

The Adoption and Adaptation of Passive Treatment Technologies for Mine Waters in The United Kingdom

Paul L Younger

Department of Civil Engineering, University of Newcastle, Newcastle Upon Tyne NE1 7RU, United Kingdom; e-mail: p.l.younger@ncl.ac.uk

Abstract. During the 1990s, passive treatment technology was introduced to the United Kingdom (UK). Early hesitancy on the part of regulators and practitioners was rapidly overcome, at least for net-alkaline mine waters, so that passive treatment is now the technology of choice for the long-term remediation of such discharges, wherever land availability is not unduly limiting. Six types of passive systems are now being used in the UK for mine water treatment:

- ◆ aerobic, surface flow wetlands (reed-beds);
- ◆ anaerobic, compost wetlands with significant surface flow;
- ◆ mixed compost / limestone systems, with predominantly subsurface flow (so-called Reducing and Alkalinity Producing Systems (RAPS));
- ◆ subsurface reactive barriers to treat acidic, metalliferous ground waters;
- ◆ closed-system limestone dissolution systems for zinc removal from alkaline waters;
- ◆ roughing filters for treating ferruginous mine waters where land availability is limited.

Each of these technologies is appropriate for a different kind of mine water, or for specific hydraulic circumstances. The degree to which each type of system can be considered “proven technology” corresponds to the order in which they are listed above. Many of these passive systems have become foci for detailed scientific research, as part of a \$1.5M European Commission project running from 2000 to 2003.

Key words: Acidity, Aerobic, Anaerobic, Compost, Iron, Metals, Passive, Reactive barrier, Water treatment, Wetlands

Introduction

Widespread mine closures in the UK during the early 1990s led to extensive surface water pollution (Younger 1993, 1998a; National River Authority 1994). Public outcry prompted the first steps towards a national strategy for dealing with the legacy of water pollution from recently- and long-abandoned mines. As regulators came to appreciate that mine water pollution often endures for decades (or even centuries) after mine abandonment (Younger 1997a; Wood *et al.*, 1999), interest quickly grew in alternatives to conventional treatment technologies, favouring in particular solutions which operated with minimal maintenance (Younger 1997b). The timely publication of the U.S. Bureau of Mines’ recommendations on the passive treatment of coal mine drainage (Hedin *et al.* 1994) proved serendipitous for the UK mining and water industries, and their design guidelines enjoyed rapid and enthusiastic uptake (Younger 1995; Younger and Harbourne 1995; Younger 1997b). By the end of 1997, a total of 8 passive treatment systems were operational at UK mine sites (Table 1, Fig. 1; see also Younger 1997b). The uptake of the technology has continued apace since then, with 23 full-scale systems and a further 5 pilot systems in operation by the Spring of 2000. All but two of the 28 systems (numbers 23 and 28 in Table 1 and Fig. 1) address abandoned mine discharges.

The objectives of this paper are: to summarise the uptake and performance of these passive treatment systems in the UK, which is the first European country to adopt the technology on

such a large scale; to highlight recent innovations in passive treatment in the UK; and to outline recent and forthcoming European research to foster wider use of the technology.

Current methods of passive mine water treatment in the UK

Six types of passive systems are now in use for mine water treatment in the UK:

- (1) Aerobic, surface flow wetlands, which are often termed "reed beds" in the UK (e.g. Laine, 1997) (Fig. 2a);
- (2) Anaerobic, compost wetlands with significant surface flow (e.g. Younger *et al.* 1997; Edwards *et al.* 1997; Younger 1998b; Jarvis and Younger 1999) (Fig. 2b);
- (3) Mixed compost / limestone systems, with predominantly subsurface flow (Fig. 2c). These systems were originally labelled "SAPS" (Successive Alkalinity Producing Systems) by their originators, Kepler and McCleary (1994). The label 'SAPS' remains popular in the UK (e.g. Younger 1998b), though G. Watzlaf and co-workers (*personal communication*, 2000) have recently referred to such systems as "Reducing and Alkalinity Producing Systems" (RAPS), which is arguably a more descriptive name for them, and is the acronym used hereafter and in Table 1;
- (4) Subsurface reactive barriers to treat acidic, metalliferous ground waters (Fig. 3a);
- (5) Closed-system limestone dissolution systems for zinc removal from alkaline waters (Nuttall and Younger 2000) (Fig. 3b); and
- (6) Roughing filters for the aerobic treatment of net-alkaline ferruginous mine waters where limited land availability precludes a surface wetland. Roughing filters are long channels packed with stones or other filter media, through which sediment-laden waters are passed to achieve rough filtration.

The first three types of system have been widely documented in the international literature (see, for instance, Hedin *et al.* 1994; Walton-Day 1999), and the principles upon which they are based need no further repetition here. The fourth type of system, subsurface reactive barriers (Fig. 3a), are no different in concept from the earlier RAPS and subsurface flow compost wetlands, save that they are employed in situations where it is possible to treat groundwater *in situ*, rather than waiting for it to discharge at the land surface as a mine water outflow. An early example of a subsurface reactive barrier being used to treat ground water polluted by mining activities was at the Nickel Rim site in Canada (Benner *et al.* 1997). Similar systems are now being installed in Europe. The first was installed at Renishaw Park, UK, in 1999 (site 10, Table 1 and Fig. 1), and a second is scheduled for construction during 2000 at Shilbottle, Northumberland, UK (site 22 in Table 1 and Fig. 1). Probably the largest barrier of this type in the world is currently under construction at Aznalcóllar, Spain (C. Ayora, *personal communication*).

The fifth and sixth types of passive system listed above are, as far as is known, unique to the UK at the time of writing. They are therefore discussed in further detail later in this article.

Each of these technologies is appropriate for a different kind of mine water, or for specific hydraulic circumstances. The degree to which each type of system can be considered "proventchnology" corresponds to the order in which they are listed. This ranking of confidence is reflected in their relative abundance in the UK. In April, 2000, there are twelve full-scale reed-bed systems (of which seven are operated by the Coal Authority, a national government agency), three RAPS, three anaerobic reed-beds, one reactive subsurface barrier, one full-scale closed-system limestone dissolution unit for zinc removal (with another at pilot scale) and one roughing filter.

Table 1. Passive treatment for mine waters in the UK – a summary of all existing systems. All concentrations are in mg/l (in the case of acidity and alkalinity, as CaCO₃ equivalent), save for pH. The mineral worked is coal except where stated in the second column.

(a) Systems in Cornwall and Wales

Site # Fig. 1	Site Name (mining district)	Date Completed	Mine water type	Passive system type	Total area (ha)	Typical influent	Typical effluent
1	Wheal Jane (Cornwall) Tin and zinc	Dec. 1994	Deep mine drainage	3 large pilot systems (aerobic wetlands followed by sealed anaerobic beds, and aerobic rock filters with 3 variations in pre-treatment--none, anoxic limestone drain or lime dosing) (Hamilton <i>et al.</i> 1997)	2.4	Fe 141 Zn 79 Cu 0.4 Mn 24 As 2.7 pH 4.0	Fe 19 Zn 45 Cu 0.2 Mn 20 As 0.01 pH 3.6
2	Pelenna I (South Wales)	Oct. 1995	Drift mine drainage	Surface flow compost wetlands (Edwards <i>et al.</i> 1997)	0.09	Fe 20 pH 6.5	Fe 5 pH 7.3
3	Pelenna II	Aug. 1999	Acidic drift mine drainage	Aerobic cell, RAPS, aerobic cell, RAPS, aerobic cell in series	0.75	Fe 35 pH 5.5	Fe 1.5 pH 6.5
4	Pelenna III	Apr. 1998	3 drift mine discharges	2 parallel streams of RAPS followed by aerobic wetland (Edwards <i>et al.</i> 1997; Younger 1998b)	1.0	Fe 69 Zn 0.034 Acid. 125 pH 5.0	Fe 4.2 Zn 0.004 Acid. 8.9 pH 7.2
5	Ynysarwed (South Wales)	March 2000	Net-acidic deep mine	Aerobic wetland polishing active treatment effluent until water quality allows use of wetland alone (Ranson and Edwards 1997; Younger <i>et al.</i> 1998)	1.0	Not yet available	Not yet available
6	Gwynfi (South Wales)	Aug. 1998	Net-alkaline drift mine	Aerobic wetland (owned by Coal Authority)	0.08	Fe 7	Fe < 1.0

(b) Systems in Leicestershire, Lancashire and Yorkshire (England)

7, 8, 9	Nailstone (Leicestershire)	Sept 1997	Spoil heap drainage	Small surface flow compost wetlands and an aerobic wetland	0.25	Fe 46 Al 47 pH 4.9	Fe 14.6 Al 9 pH 5.6
10	Renishaw Park South Yorkshire	Nov. 1999	Spoil leachate	Subsurface reactive barrier (owned by Coal Authority)	0.004	Not yet available	Not yet available
11	Dodworth Pit Heap South Yorkshire	Sept. 1994	Spoil leachate	Aerobic wetland (Bannister, 1997)	0.25	Fe 30 pH 6.5	Fe < 1.0 pH 7.3
12	Woolley Colliery West Yorkshire	July 1995	Alkaline pumped deep mine water	Aerobic wetland receiving effluent from Coal Authority treatment plant, which lowers Fe from 40 to 10 (Laine 1997, 1998).	1.4	Fe 10	Fe < 1
13	Old Meadows Drift (East Lancashire)	Sept. 1999	Net-acidic drift mine discharge	Aerobic wetland polishing effluent from Coal Authority treatment plant, which lowers Fe from 50 to 5). (Laine 1998)	0.16	Fe 5	Fe < 1
14	Skinningrove (Cleveland, N Yorkshire) Old ironstone mine, siderite orebody with pyritic roof	Pilot: Nov. 1999; full scale: Summer 2000	Net-alkaline, deep mine shaft overflow	Roughing filter to remove Fe from water, located below ground in a steep-sided, urbanised valley, where wetlands not feasible	0.25	Not yet available	Not yet available

Table 1 (continued)
(c) Systems in Durham, Cumbria and Northumberland (England)

Site # Fig. 1	Site Name (mining district)	Date Completed	Mine water type	Passive system type	Total area (ha)	Typical influent	Typical effluent
15	St Helen Auckland (South Durham)	Aug. 1999	Mine shaft overflow	Aerobic wetland (English Partnerships).	0.25	Fe 3 Alk. 500 pH 6.3	Fe 0.3 Alk. 480 pH 6.7
16	Bowden Close (West Durham)	Sept. 1999	Spoil leachate / drift mine drainage?	Pilot-scale RAPS followed by small aerobic wetland (Durham County Council).	0.1	Fe 20 Al 8 pH 5.0 Alk. 4	Fe 3 Al 0.1 pH 7.2 Alk. 225
17	Nenthead (Cumbria) Abandoned Pb-Zn mine	July 1998	Zinc-rich, alkaline mine water	Pilot closed-system limestone dissolution reactor (Nuttall and Younger 2000)	0.0007	Zn 8	Zn 3
18	Tailrace Level (Durham) Recently abandoned Pb-Zn-F mine	Feb 2000	Zinc-rich, alkaline mine water	Closed-system limestone dissolution reactor (Environment Agency)	0.25	Zn 40	Not yet available
19	Edmondsley Yard Drift (Central Durham)	Sept. 1999	Net-alkaline drift mine water	Aerobic wetlands (Coal Authority).	1.25	Fe 27	Fe 0.1
20	Quaking Houses (Northwest Durham)	Pilot: Feb 95 Full-scale: Sept 97	Acidic spoil heap leachate	Surface flow compost wetland. (Younger <i>et al.</i> 1997; Jarvis and Younger 1999; Kemp and Griffiths 1999)	0.04	Fe 10 Al 53 pH 4.5	Fe 1 Al <0.5 pH 6.5
21	Oatlands (West Cumbria)	Sept. 1998	Acidic spoil heap leachate	Aerobic wetland (see Warner 1997)	0.16	Fe 85 pH 4.0	Fe 25 pH 3.1
22	Shilbottle Northumberland	1995	Acidic spoil heap leachate	Aerobic wetland (reactive barrier under construction)	0.3	Fe 100 pH 3.5	Fe 25 pH 3.0

(d) Systems in Scotland

23	Craigenbay (Galloway, Scotland) Aggregates with low-grade mineralisation	August 1998	Open pit and stockpile drainage	4 aerobic cells, 2 with RAPS pre-treatment (Norton <i>et al.</i> 1998)	0.14	pH 3.5	pH 5.5
24	Dalquharran (Ayrshire, Scotland)	September 1994	Deep mine drift drainage	Aerobic wetland (Marsden <i>et al.</i> 1997)	0.095	Fe 200	Fe 50
25	Monktonhall (East Lothian, Scotland)	July 1998	Deep mine pumped effluent	Aerobic wetland polishing effluent from active treatment plant	0.5	Fe 10	Fe < 1
26	Minto Colliery (Ore Valley, Fife)	April 1998	Deep mine shaft overflow	Aerobic wetland (Coal Authority)	1	Fe 18	Fe < 1
27	Mains of Blairingone (Clakmannan coalfield)	November 1995	Old adit draining back-filled opencast	Aerobic wetland (Marsden <i>et al.</i> 1997; Younger 2000a)	6.2	Fe 38	Fe 2.3
28	Foss Mine (Aberfeldy) Barite in pyritic and sphaleritic orebody	August 1998	Active mine workings pumped drainage	Pilot scale system comprising RAPS followed by aerobic wetlands, then closed-system limestone bed	0.005	Fe 2 Mn 14 Al 8 Zn 32 pH 5.4	Fe 0.4 Mn 12 Al 1.5 Zn 25 pH 5.8

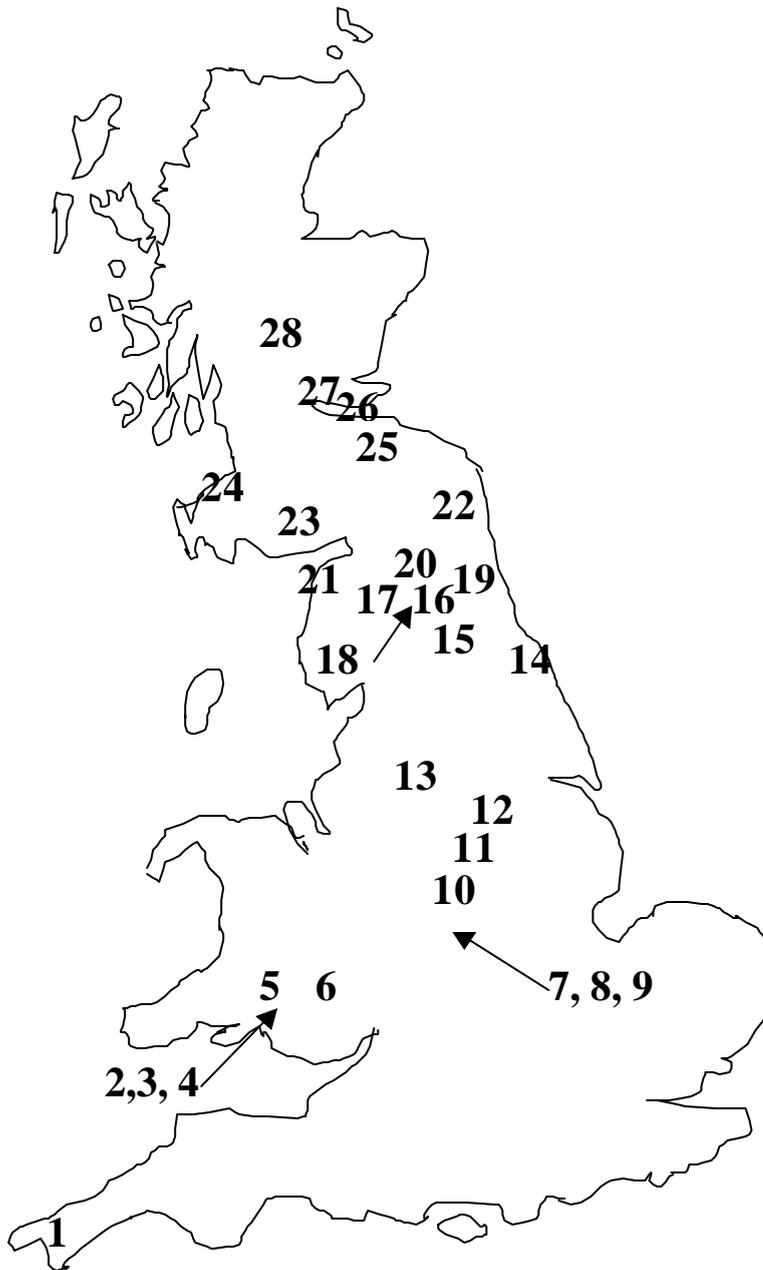


Figure 1. Locations of passive mine water treatment systems in the UK as of 30th April 2000. The identities of the numbered locations are given in Table 1. The systems marked here include six “pilot” systems (sites 1, 14, 16, 17, 22 and 28), and four sites at which passive treatment forms only part of an overall treatment system which includes “active treatment” unit processes (sites 5, 12, 13 and 25).


Recent innovations in passive mine water treatment in the UK

Optimising ochre accretion with roughing filters


The population density of the UK is about ten times greater than that of the USA. This simple demographic fact results in passive treatment frequently being far more difficult (and/or

expensive) to implement in the UK. Indeed the UK's leading developer of passive treatment systems, the Coal Authority, regards restricted availability of land as the single greatest restraint on the wider application of passive mine water treatment (Parker 1997). In response, significant research effort has been dedicated to finding methods for removing iron from net-alkaline mine waters at cramped and/or steep, sites.

(a) Surface flow aerobic reed bed, for net-alkaline, ferruginous mine waters

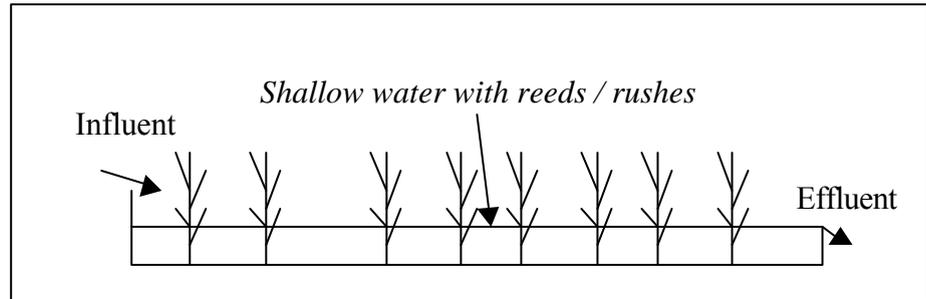

(b) Surface flow compost wetland, for acidic mine waters where head is limiting

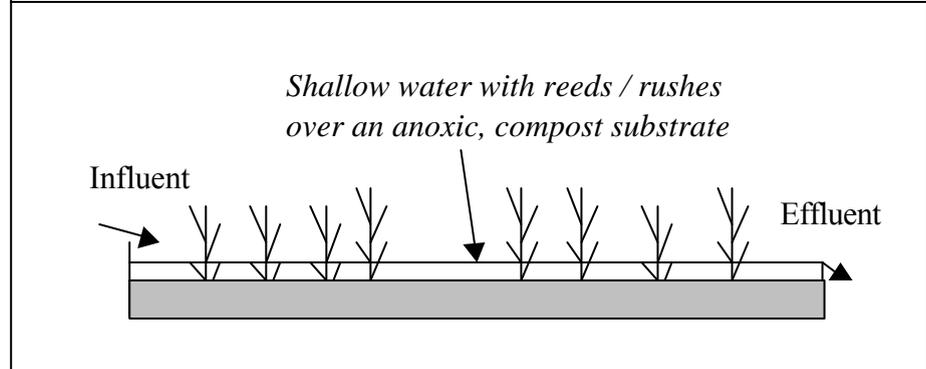

(c) Reducing and Alkalinity Producing Systems (RAPS) for acidic mine waters where there is sufficient head

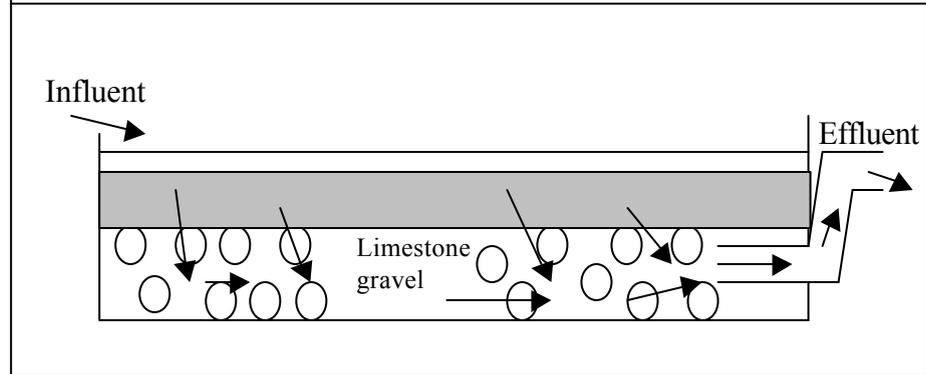


Figure 2. Schematic illustrations of the three most common types of passive treatment system used for polluted mine waters in the UK.

The principle avenue explored in this research has been the possible use of surface-catalysed oxidation of ferrous iron (SCOOFI). The ochre (i.e. ferric hydroxide) that naturally precipitates from such waters serves as the catalyst. The SCOOFI process occurs naturally at virtually all mine water discharges: it is operative wherever ochre can be seen to be accreting from mine water flowing at velocities in excess of that which would foster natural settlement of colloids from suspension. SCOOFI is a simple two-step process. First, ferrous iron is removed from the water by sorption onto the highly polar surface of fresh ochre. Once the ferrous ions are attached, they are oxidised *in situ* by dissolved oxygen,

with the ferric hydroxide acting as a catalyst, accreting a further layer on the surface of the ochre. Oxidation of ferrous iron in this manner is far more rapid than oxidation by dissolved oxygen in free solution. Hence, on cramped sites, systems efficiently employing SCOOFI offer the potential for achieving passive treatment without wetlands. Recent UK research has focused on the use of reactors packed with media of high specific surface area on which ochre can be accreted and SCOOFI initiated and sustained. We have used commercial PVC trickling filter media and blast furnace slag an abundant waste material characterised by a naturally high specific surface area.

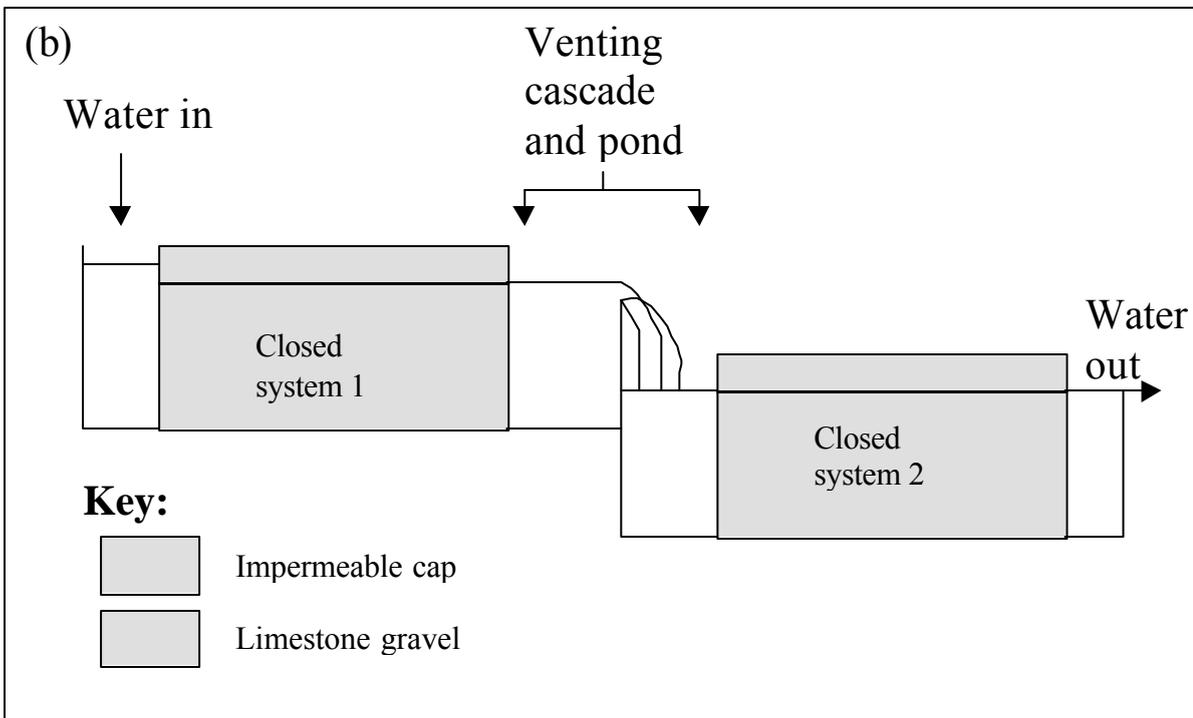
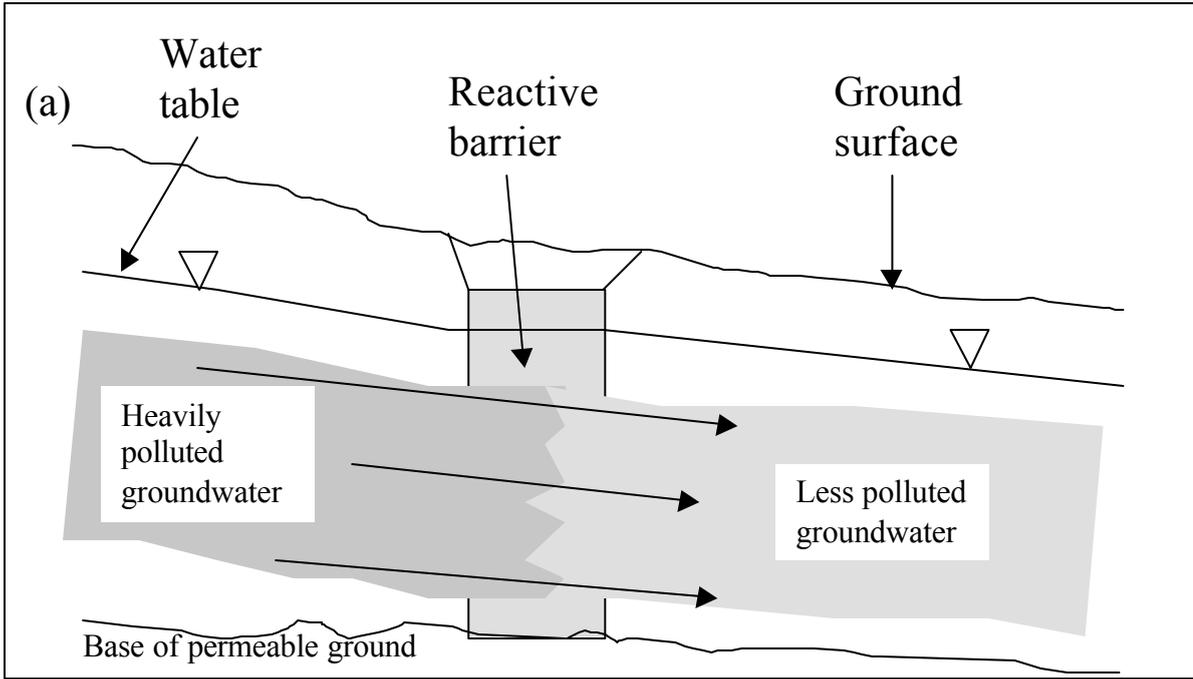


Figure 3. Schematic drawings of two less common types of passive treatment system: (a) subsurface reactive barrier for acidic, metalliferous ground waters found at mine sites, and (b) successive closed-system carbonate dissolution units for subsurface treatment of alkaline, zinc-rich mine waters.

Most experiments to date have been undertaken using unsaturated flow conditions, with water trickling through the media. In two reactors fed with an average influent iron concentration of

1.43 mg.l⁻¹ over a six-month period, mean effluent iron concentrations were 0.41 mg/l and 0.38 mg.l⁻¹. Variations in influent iron loading rates (achieved by varying the flow rate)

demonstrated that iron removal rates increase linearly with loading rate, up to around 14 g.d^{-1} (Fig. 4). Although the relationship apparently becomes non-linear at higher loading rates, the rate of removal remains as high as 50% for a loading rate of nearly 32 g.d^{-1} Fe. Residence time in these reactors is as little as 70 seconds. The combination of short residence time and efficient removal of iron at low influent concentrations strongly suggests that these reactors may be an effective passive alternative to aerobic wetlands, particularly at sites where topography and/or land area are restrictive. The preliminary results suggest that such reactors may be as much as an order of magnitude more efficient than aerobic wetlands (Jarvis and Younger 2000).

In practice, the application of SCOOFI at full-scale requires consideration of a number of issues. For discharges of high flow rate, SCOOFI-based systems may need to be run under saturated flow conditions. This can be expected to have negative implications for oxygen transfer rates, which might be addressed by incorporating venturi devices into the influent pipework of the

systems. Other practical issues relate to system maintenance requirements, such as the logistics and frequency of removal of some of the media for de-sludging, and the disposal or re-use of the ochre sludge. Current research at Skinningrove, Cleveland (site 14, Table 1 and Fig. 1) is examining both the logistics of saturated flow SCOOFI applications and the practicalities and economics of long-term operation and maintenance. The two substantial Skinningrove discharges arise from adjoining, flooded ironstone workings that were abandoned in the 1960s (Younger 2000b). The larger of the two discharges has a mean flow of about $2073 \text{ m}^3.\text{d}^{-1}$, while the other discharges at about $1900 \text{ m}^3.\text{d}^{-1}$. The discharges arise from shafts a few tens of metres apart, and have virtually identical chemistry, being brackish and net-alkaline with mean dissolved iron of $16.3 \pm 0.82 \text{ mg.l}^{-1}$. The discharges emerge into the local river, the Kilton Beck, immediately upstream of the village of Skinningrove, the dwellings of which occupy all available flat land in the valley floor along the full length of the Beck to the North Sea. Apart

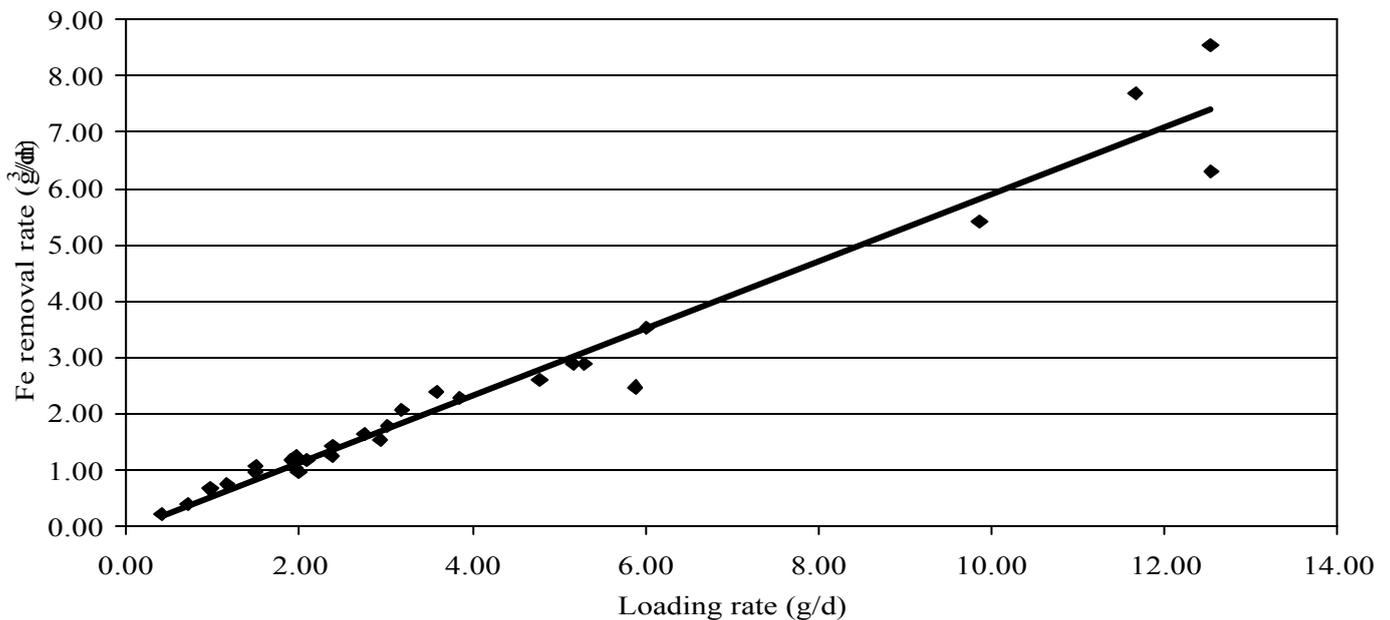


Figure 4. Iron removal rate as a function of loading rate for unsaturated flow of mine water through two pilot reactors filled with media of high specific surface area.

from the visual impact of the discharge, it also acts as a significant barrier to migratory salmonid fish, which have to pass through the impacted reach of the river to access spawning grounds upstream. With no "problem owner" upon whom a duty to undertake active treatment might have been enforced, and with no flat land available for a wetland system, the possibility of using a SCOOFI-based system has been examined for this case. The intent is to construct the system beneath a car parking area, which can retain its primary use whilst affording subsurface space for mine water treatment. A pilot SCOOFI reactor was constructed to receive half of the flow of the larger of the two discharges, and it was operated from October 1999 for six months. Influent and effluent samples were collected weekly by local residents. The reactor was only 9.5m in length, and comprised 8 gabions packed with blast furnace slag, arranged in series. Residence times in the reactor cannot have exceeded 10 minutes at any time during the period of operation, and were probably closer to four minutes on average. Substantial iron removal was observed (Fig. 5).

These data are being used to constrain designs for a full-scale SCOOFI-based reactor at this site (scheduled for construction in June 2000). The

type of system envisaged will physically resemble an established low-cost water treatment technology, the "roughing filter", which is occasionally used to filter turbid surface waters in river intakes. Although the principle of operation of the Skinningrove SCOOFI reactor differs somewhat from that of a conventional roughing filter, the same name is being applied to it on account of the similarity in form.

Removing zinc as a carbonate

Particular difficulties have been encountered in the UK with attempts to passively treat hard, net-alkaline mine waters with elevated dissolved zinc (up to 40 mg/l). These waters are relatively common in the former Pb-Zn mining field of the North Pennines, where they cause significant ecological damage in receiving streams (Nuttall and Younger 1999). Such waters are not readily amenable to sulphidisation in compost-based systems (Younger 1997c), as ZnS does not readily precipitate at neutral pH. Experimental work has demonstrated that dissolution of limestone under closed-system conditions can create conditions favourable for the precipitation of zinc as its carbonate, smithsonite ($ZnCO_3$).

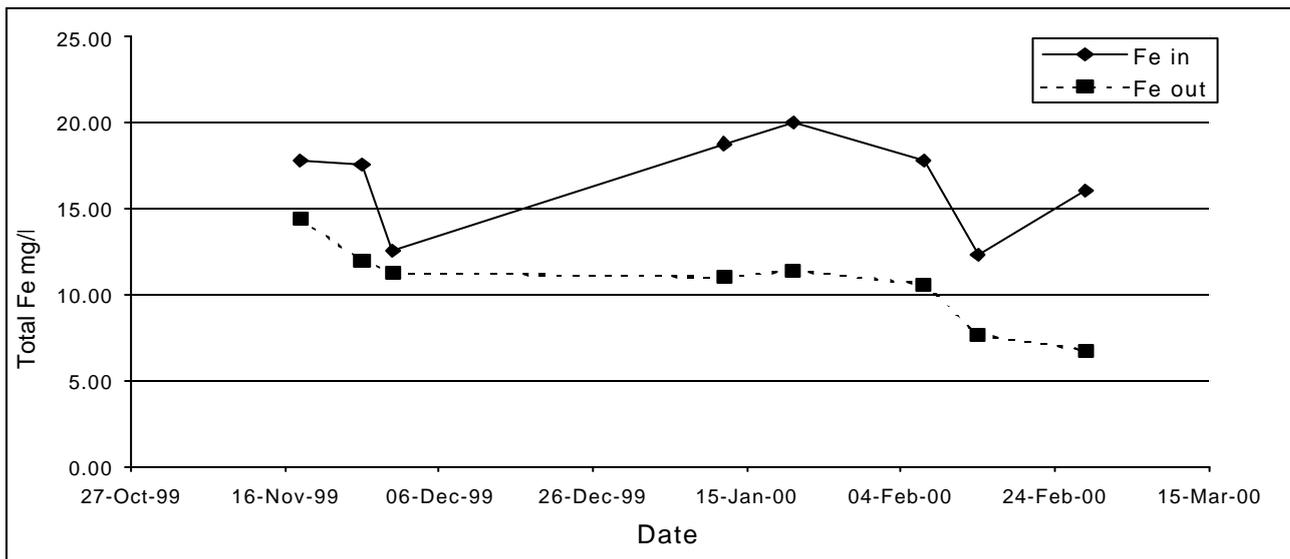


Figure 5. Influent ('Fe in') and effluent ('Fe out') iron concentrations for the pilot roughing filter at Skinningrove, Cleveland (site 14 on Figure 1 and in Table 1). Note that the filter was treating the full mine water flow ($2073 \text{ m}^3 \cdot \text{d}^{-1}$) up to 14th January 2000, after which half of the flow was diverted, leaving $1036 \text{ m}^3 \cdot \text{d}^{-1}$ to pass through the filter.

Hence closed-system limestone gravel beds are a possible means of passive treatment for such waters (Nuttall and Younger 2000). In basic form, these closed-system limestone dissolution units differ little from conventional anoxic limestone drains (ALDs; e.g. Hedin *et al.* 1994). However, closed-system cells for zinc removal require venting to the atmosphere after a few hours of retention time in order to restore pCO₂ to relatively aggressive values. In this respect, their construction differs markedly from that of standard ALDs (Fig. 3b), in which aeration steps would never be incorporated. Experimental data obtained to date suggest that a retention time of around four hours may be sufficient to remove 50% of the zinc from a water containing 5-10 mg.l⁻¹ Zn (Nuttall and Younger 2000). Successive closed-system tanks in series can result in considerable net removal of Zn. Practical problems with the use of these systems may arise after some months of operation due to blinding of the reactive limestone surfaces with smithsonite. It is possible that this problem can be overcome by the use of fluidised bed configurations, though this will require further investigation.

Process-level research: findings and prospects

Many of the passive systems listed in Table 1 have become foci for detailed scientific research, and are also being used as demonstration systems to foster the wider adoption of passive mine water treatment elsewhere in Europe. The emerging research agenda in the UK is for detailed, investigations of the biogeochemistry of passive treatment systems. It is hoped that the outcomes of such research will assist in the gradual replacement of existing empirical design criteria with more scientifically-based design theory. One preliminary example of this type of process-level research, which relates to the identification of processes that raise pH in compost wetlands, is given below for illustration.

Compost-based systems can cope with a wider range of influent pH and a broader cocktail of contaminant metals than can aerobic reed-beds. Contaminant removal processes in most compost wetlands are predominantly microbial (e.g. Hedin

et al. 1994; Walton-Day 1999). Bacterial sulphate reduction generally governs both the raising of pH and the removal of those metals that form sulphides at ambient temperatures and pressures (Fe²⁺, Zn²⁺, Cu²⁺, etc). The coupling of sulphate reduction to bicarbonate generation is often written:




Reaction of this bicarbonate with protons present in the water yields a rise in pH (at least as long as the CO₂ is able to vent to the atmosphere):





This rise in pH fosters the precipitation of hydroxide minerals, which can help to remove metals that do not form sulphides at ambient temperatures and pressures (e.g. Al³⁺ and Fe³⁺).

Equations 1 and 2 are the most common formulation of the treatment pathway presumed to be occurring in compost wetlands (e.g. Hedin *et al.* 1994). However, preliminary process studies in the Quaking Houses pilot wetland (site 20, Table 1) suggest that other processes may also contribute to pH buffering (and hence to overall treatment efficiency). Although sulphate reducing bacteria (SRB) were found to be abundant and active in the wetland substrate, and despite the known presence of limestone within the compost, the observed rise in pH was greater than could be explained by the observed levels of SRB activity (as indicated by changes in dissolved SO₄²⁻ concentrations) and/or limestone dissolution (as revealed by changes in Ca and Mg concentrations). Freeze-coring and analysis of the wetland substrates indicated that total sulphur was present in three forms, in the following proportions:



On the basis of these observations, it is postulated that the pH rise in excess of that explained by calcite dissolution and reactions (1) and (2) is due to the consumption of protons through a reaction chain involving reduction of ferric hydroxide and precipitation of native sulphur. While proton consumption by ferric hydroxide dissolution has

previously been recognised as a potentially important process in lake sediments and constructed wetlands (Anderson and Schiff 1987; Walton-Day 1999), the inclusion of native sulphur precipitation in the reaction chain has not previously been considered. The simultaneous removal of iron from solution (which is clearly demonstrated by the data (Table 1) (Jarvis and Younger 1999) and formation of significant quantities of S^0 is consistent with the following coupled reactions:



Equations (3) and (4) explain how a net consumption of H^+ can be driven by bacterial sulphate reduction and partial re-oxidation of sulphide (but only as far as S^0) whilst having very little effect on alkalinity concentrations. For instance, HCO_3^- released by calcite dissolution, or by sulphate reduction (reaction (1)) is consumed in reaction (4). If the sequence of reactions represented by (3) and (4) are realistic, then compost wetland treatment systems may be even more complex (and perhaps also more finely-balanced) than previously envisaged.

To consolidate and expand upon process-level studies such as this, the European Commission has recently funded a \$1.5M, three-year project entitled 'Passive In-situ Remediation of Acidic Mine / Industrial Drainage' (PIRAMID). Full details of the PIRAMID project are available at: <http://www.piramid.org>

PIRAMID involves ten research and consultancy organisations in five EU Member States (UK, Spain, Sweden, France and Germany) and a candidate Member State (Slovenia), and is funded from March 2000 to February 2003. The objectives of PIRAMID are:

1. To assemble a database of European experience with passive in situ remediation (PIR) of acidic mine/industrial drainage, covering both surface and subsurface PIR systems;
2. To develop process-based models of PIR system performance to support future design improvements;

3. To critically evaluate the potential application of PIR in areas of Europe which still do not have the technology;
4. To test novel approaches to PIR in both the laboratory and the field, targeted at other contaminants and using novel substrates; and
5. To develop engineering guidelines for PIR application at new sites throughout the EU.

The work programme designed to achieve these specific objectives is heavily weighted in favour of process-level research into passive treatment, whilst prioritising particular experiments on the basis of utility for end-users. Particular issues to be addressed include:

The hydraulics of passive treatment systems: Although influent and effluent flow volumes are generally well-constrained by engineered structures, the internal hydrodynamics remain poorly understood, especially in systems where flow occurs in both surface and subsurface zones. Carefully planned tracer tests and low-rate pumping tests will be implemented to improve our understanding of hydraulic processes.

Design criteria for passive systems: Tarutis *et al.* (1999) have made a convincing case for the replacement of unrealistic sizing models for aerobic wetlands, which implicitly assume "zero-order" kinetic models, with more appropriate first-order kinetic models. Although Tarutis *et al.* (1999) did not consider compost wetlands, data from the Quaking Houses and Pelenna III systems in the UK strongly suggest that a similar case can be made to revise sizing criteria for compost wetlands. The basis for such criteria will be examined by detailed sampling of pore waters and sediments supported by rigorous statistical analysis and kinetic geochemical modelling.

Long-term performance of passive systems: Of prime concern to the owners and funders of passive treatment systems is an as-yet-unanswerable question about the longevity of such systems. While simple calculations of the longevity of aerobic wetlands can be made by assuming consumption of freeboard by steadily accumulating hydroxides, complications such as diagenesis of the hydroxides and remobilisation of iron have yet to be studied in detail, let alone

incorporated into management guidelines. The uncertainties are considerably greater for anaerobic, compost-based systems. For instance, we need to know the rates at which labile organic carbon will be consumed by SRB, and the rate at which it will be replenished by seasonal die-back of macrophytes. Further issues arise in relation to rates of pore clogging by sulphide precipitates etc. Again, careful sampling and analysis of pore waters and sediments, including determinations of stable isotope ratios, are expected to yield substantial advances in understanding.

Conclusions

Passive treatment technology for mine waters was introduced to the UK during the 1990s, principally by adoption of U.S. Bureau of Mines experiences (Hedin *et al.*1994). Regulatory acceptance was soon gained, and passive treatment is now the technology of choice wherever possible for the long-term remediation of mine water. Innovations in passive treatment are now beginning to arise in the UK in response to issues of limited land availability and the occurrence of peculiar net-alkaline mine waters very rich in zinc. Roughing filters, which remove iron from mine waters by the SCOOFI process, are now being developed to full-scale as an alternative to wetland treatment where space is very limited. Zinc removal from waters of neutral pH appears to be feasible using a variant of ALD technology. Scientific research into passive system performance is being marshalled via a \$1.5M European Commission project (PIRAMID), running from 2000 to 2003. While PIRAMID will incorporate activities relating to collation of existing data and dissemination of engineering guidelines, it also encompasses basic process-level research into the hydraulics, reaction kinetics and longevity of passive systems.

Acknowledgements

Funding and considerable in-kind support has been provided by: the European Commission, the Engineering and Physical Sciences Research Council, the Coal Authority, International Mining

Consultants Ltd, the Environment Agency, the Coal Authority, the Quaking Houses Environmental Trust, the Loftus Development Trust, Helix Arts, Northumbrian Water Kick-Start Fund, Neath Port-Talbot County Borough Council, English Partnerships, Durham County Council, Durham Industrial Minerals Ltd, M I Drilling (UK) Ltd, Viridor Ltd, Mass Transfer International, Cleveland Potash Ltd and Binnie Ferguson McIlveen. The following have been invaluable: A. Jarvis, S. Banwart, S. Burke, C. Nuttall, K. Johnson, M. Goebes, L. Batty, D. Heasman, A. Aplin, D. Laine, K. Parker, C. Ranson, M. Oliver, R. Coulton, D. Elliott, P. Norton, A. Clutterbuck, T. Evans, T. Richardson, L. Orange, N. Butcher, J. Allan, A. Doyle, P. Davison, E. Lott and the students of King James I Comprehensive School (Bishop Auckland).

References

- Anderson RF, Schiff SL (1987) Alkalinity generation and the fate of sulfur in lake sediments. *Canadian Journal of Fisheries and Aquatic Sciences*, 44 (1): 188-:193.
- Bannister AF (1997) Lagoon and reed-bed treatment of colliery shale tip water at Dodworth, South Yorkshire. In Younger PL (ed) *Minewater Treatment Using Wetlands*. Proc of a National Conf, University of Newcastle, UK. Chartered Institution of Water and Environmental Management, London, pp 105–122.
- Benner SG, Blowes DW, Ptaceck CJ (1997) A full-scale porous reactive wall for prevention of acid mine drainage. *Ground Water Monitoring and Restoration* (Fall 1997), pp 99–107.
- Edwards PJ, Bolton CP, Ranson CM, Smith AC (1997) The River Pelenna minewater treatment project. In: Younger PL (ed.), *Minewater Treatment Using Wetlands*. Proc of a National Conf, University of Newcastle, UK. Chartered Institution of Water and Environmental Management, London, pp 17–32.
- Hamilton QUI, Lamb HM, Hallett C, Proctor JA (1997) Passive treatment systems for the remediation of acid mine drainage Wheal Jane,

- Cornwall, UK. In: Younger PL (ed.) *Minewater Treatment Using Wetlands*. Proc of a National Conf, University of Newcastle, UK. Chartered Institution of Water and Environmental Management, London, pp 33–56.
- Hedin RS, Nairn RW, Kleinmann RLP (1994) *Passive Treatment of Coal Mine Drainage*. U.S. Bureau of Mines I.C. 9389, 35 pp.
- Jarvis AP, Younger PL (1999) Design, construction and performance of a full-scale wetland for mine spoil drainage treatment, Quaking Houses, UK. *Journal of the Chartered Institution of Water and Environmental Management*, 13: 313–318.
- Jarvis AP, Younger PL (2000) Rapid removal of iron from net-alkaline minewaters using high specific surface area media. *South African Journal of Science* (in review).
- Kemp P, Griffiths J (1999), *Quaking Houses*. Art, Science and The Community: A collaborative approach to water pollution. Jon Carpenter Publishing, Charlbury, Oxon. 142 pp.
- Kepler DA, McCleary EC (1994) Successive Alkalinity Producing Systems (SAPS) for the Treatment of Acidic Mine Drainage. Proc of the International Land Reclamation and Mine Drainage Conf and the 3rd International Conf on the Abatement of Acidic Drainage. (Pittsburgh, PA). Vol 1, pp 195-204.
- Laine DM (1997) The treatment of the pumped minewater discharge at Woolley Colliery, West Yorkshire. In: Younger PL (ed.) *Minewater Treatment Using Wetlands*. Proc of a National Conf, University of Newcastle, UK. Chartered Institution of Water and Environmental Management, London, pp 83 – 103.
- Laine DM (1998) The treatment of pumped and gravity minewater discharges in the UK and an acidic tip seepage in Spain. Proc of the International Mine Water Association Symp, Johannesburg, South Africa. (Vol II), pp. 471–490.
- Marsden M, Kerr R, Holloway D, Wilbraham D (1997) The position in Scotland. In: Bird L (ed.) Proc of the UK Environment Agency Conf on Abandoned Mines: Problems and Solutions, University of Sheffield, pp. 74–84.
- National River Authority (1994) *Abandoned mines and the water environment*. Report of the National Rivers Authority. Water Quality Series No 14. London, HMSO, 46pp.
- Norton PJ, Norton CJ, Tyrrell W (1998) The design, construction and cost of an engineered wetland for treatment of acid drainage from sulphide mineral-rich strata. In: Proc of the International Mine Water Association Symp, Johannesburg, South Africa. (Vol. II), pp. 425–432.
- Nuttall CA, Younger PL (1999) Reconnaissance hydrogeochemical evaluation of an abandoned Pb-Zn orefield, Nent Valley, Cumbria, UK. Proc of the Yorkshire Geological Society, 52, pp 395–405.
- Nuttall CA, Younger PL (2000) Zinc removal from hard circum-neutral mine waters using a novel closed-bed limestone reactor. *Water Research*, 34: 1262-1268.
- Parker K (1997) *Minewater – the First Two Years of the Coal Authority*. In: Bird L (ed.) Proc of the UK Environment Agency Conf on Abandoned Mines: Problems and Solutions, University of Sheffield, pp 154 - 161.
- Ranson CM, Edwards PJ (1997) The Ynysarwed experience: active intervention, passive treatment and wider aspects. In: Younger PL (ed.) *Minewater treatment using wetlands*. Proc of a National Conf, University of Newcastle, UK. Chartered Institution of Water and Environmental Management, London. pp 151-164.
- Tarutis WJ, Stark LR, Williams FM (1999) Sizing and performance estimation of coal mine drainage wetlands. *Ecological Engineering*, 12: 353–372.
- Walton-Day K (1999) Geochemistry of the processes that attenuate acid mine drainage in wetlands. In: Plumlee GS, Logsdon MJ (eds) *The environmental geochemistry of mineral deposits*. Reviews in Economic Geology,

- Volume 6A, Society of Economic Geologists, Littleton, CO, pp 215–228.
- Warner I (1997) Oatlands Colliery – West Cumbria. In: Bird L (ed.), Proc of the UK Environment Agency Conf on "Abandoned Mines: Problems and Solutions". University of Sheffield, pp 40–51.
- Wood SC, Younger PL, Robins NS (1999) Long-term changes in the quality of polluted minewater discharges from abandoned underground coal workings in Scotland. *Quarterly Journal of Engineering Geology*, 32: 69–79.
- Younger PL (1993) Possible Environmental Impact of the Closure of Two Collieries in County Durham. *Journal of the Institution of Water and Environmental Management*, 7: 521-531.
- Younger PL (1995) Hydrogeochemistry of minewaters flowing from abandoned coal workings in the Durham coalfield. *Quarterly Journal of Engineering Geology*, 28(4): S101-S113.
- Younger PL (1997a) The Longevity of Minewater Pollution: A Basis for Decision-Making. *Science of the Total Environment*, 194/195: 457-466.
- Younger PL (1997b) Minewater Treatment Using Wetlands. Proc of a National Conf, University of Newcastle, UK. *Chartered Institution of Water and Environmental Management*, London. 189pp.
- Younger PL (1997c) The future of passive minewater treatment in the UK: a view from the Wear Catchment. In: Younger PL (ed.), *Minewater Treatment Using Wetlands*. Proc of a National Conf, University of Newcastle, UK. *Chartered Institution of Water and Environmental Management*, London. pp. 65-81.
- Younger PL (1998a) Coalfield Abandonment: Geochemical Processes and Hydrochemical Products. In: Nicholson K., *Energy and the Environment. Geochemistry of Fossil, Nuclear and Renewable Resources*. Society for Environmental Geochemistry and Health. McGregor Science, Aberdeenshire, pp 1–29.
- Younger PL (1998b) Design, construction and initial operation of full-scale compost-based passive systems for treatment of coal mine drainage and spoil leachate in the UK. Proc of the International Mine Water Association Symp, Johannesburg, South Africa. (Vol. II), pp. 413–424.
- Younger PL (2000a) Mine water pollution in Scotland: nature, extent and preventative strategies. *Science of the Total Environment*.
- Younger PL (2000b) Mine water pollution in the long-abandoned Cleveland Ironstone Field, north-east England. Proc of the 7th National Hydrology Symp, British Hydrological Society. Newcastle Upon Tyne, UK.
- Younger PL, Harbourne KJ (1995) "To pump or not to pump": Cost-benefit analysis of future environmental management options for the abandoned Durham Coalfield. *Journal of the Chartered Institution of Water and Environmental Management*, 9(4): 405-415.
- Younger PL, Curtis TP, Jarvis AP, Pennell R (1997) Effective passive treatment of aluminium-rich, acidic colliery spoil drainage using a compost wetland at Quaking Houses, County Durham. *Journal of the Chartered Institution of Water and Environmental Management*, 11: 200-208.
- Younger PL, Large ARG, Jarvis AP (1998) The creation of floodplain wetlands to passively treat polluted minewaters. In: Wheater H, Kirby C (eds.), *Hydrology in a Changing Environment*. (Proc of International Symp organised by the British Hydrological Society, Exeter, UK). Volume I. pp 495-515.